


6 TO 18 GHz LOW-NOISE RECEIVER FRONT ENDS

MODELS: ARM0618LC2A, ARM0618LC2B AND ARM0618LC2C

FEATURES

- RF/LO coverage 6 to 18 GHz
- Conversion gain 24 dB typical
- Noise figure 3.5 dB typical




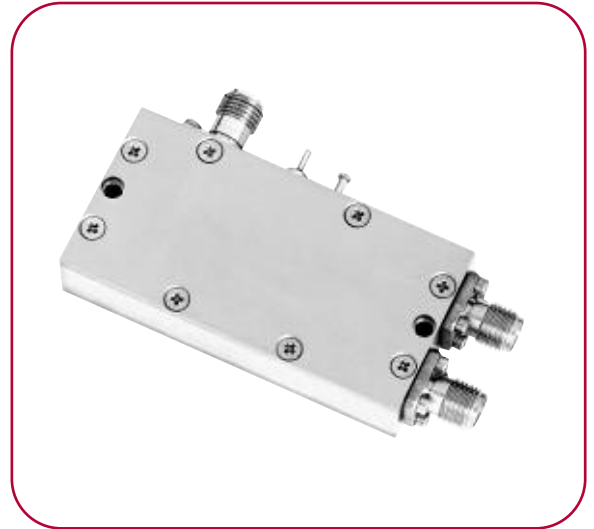


MITEQ's Model AR Series offers state-of-the-art low-noise amplifiers integrated with our ultra-small image rejection mixers to provide a complete receiver front-end assembly. This device comes in a nonhermetic housing, however a hermetically-sealed housing is available for extreme environmental conditions.

ELECTRICAL SPECIFICATIONS

INPUT PARAMETERS	CONDITION	UNITS	MIN.	TYP.	MAX.
RF frequency range		GHz	6		18
RF VSWR (RF = -10 dBm, LO = +10 dBm)		Ratio		2.5:1	
LO frequency range		GHz	6		18
LO power range		dBm	+10		+13
LO VSWR (LO = +10 dBm)		Ratio		2.5:1	
DC power	+15 VDC -5 VDC	mA mA		150 25	
TRANSFER CHARACTERISTICS	CONDITION	UNITS	MIN.	TYP.	MAX.
Conversion gain (Note 1)		dB	22	24	
Single-sideband noise figure at 25°C		dB		3.5	4
Image rejection (Note 1)		dB	18	22	
LO-to-RF isolation		dB	40	50	
LO-to-IF isolation		dB		20	
RF-to-IF isolation		dB		20	
Output power at 1 dB compression		dBm		5	
Output two-tone third-order intercept point		dBm		15	
OUTPUT PARAMETERS	CONDITION	UNITS	MIN.	TYP.	MAX.
IF frequency range	ARM0618LC2A ARM0618LC2B ARM0618LC2C	MHz MHz MHz	20 40 100		40 80 200
IF VSWR (IF = -10 dBm, LO = +10 dBm)		Ratio		2:1	

ARM0618LC2B TYPICAL TEST DATA

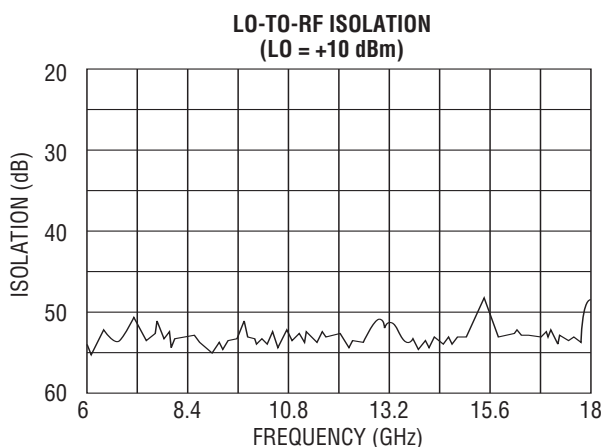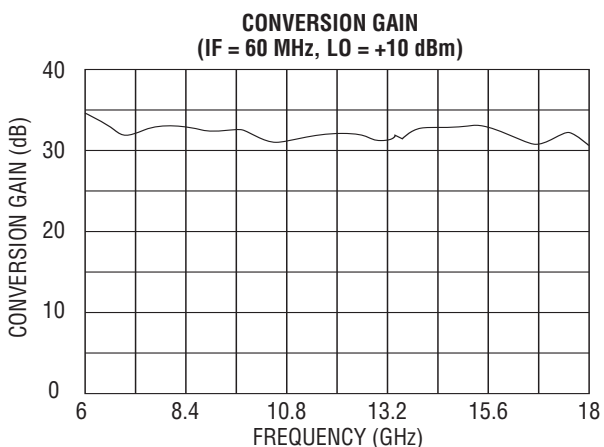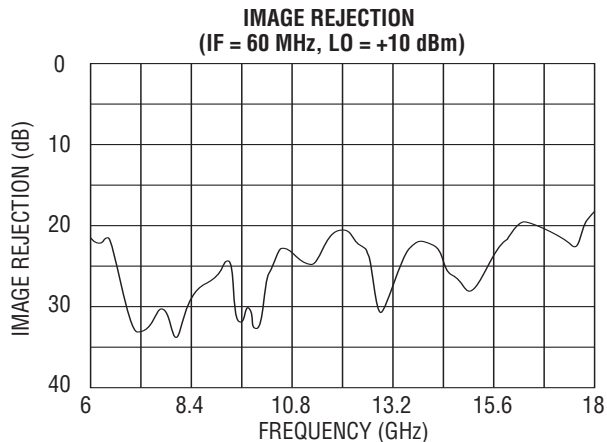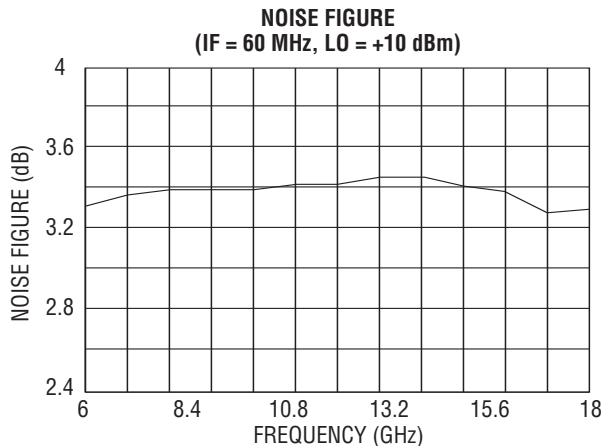

MAXIMUM RATINGS


Specification temperature +25°C
 Operating temperature -54 to +85°C
 Storage temperature -65 to +125°C

GENERAL NOTE

1. Unit aligned for RF > LO conversion.

NOTE: Test data supplied at 25°C; conversion gain, LO-to-RF isolation, image rejection and noise figure.

OUTLINE DRAWING

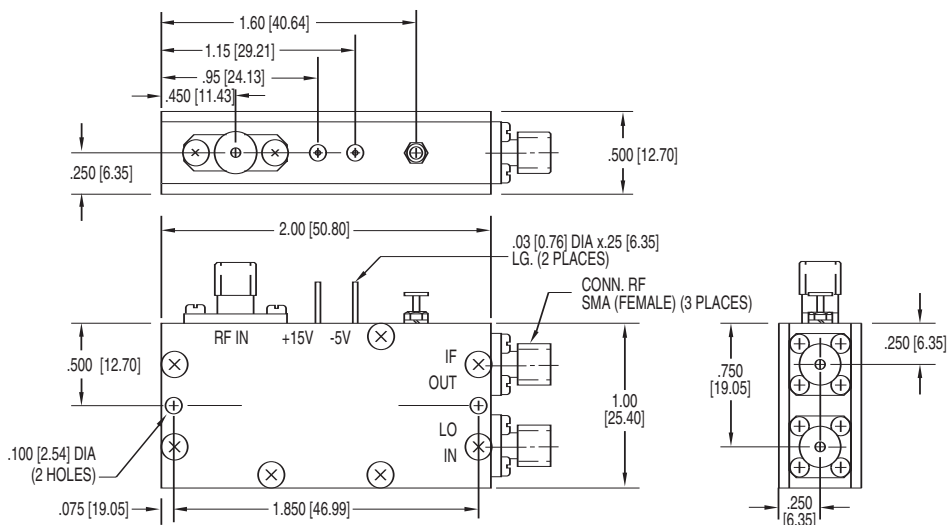

NOTE: All dimensions shown in brackets [] are in millimeters.

