
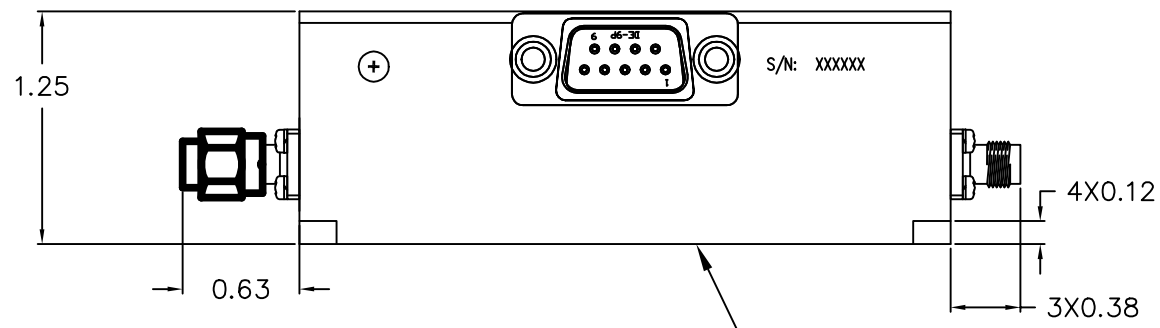



DASH NO.	APPLICATION		REVISIONS			
	NEXT ASSY	USED ON	LTR	DESCRIPTION	DATE	APPROVED

B SEE ECN 6192 9/7/2007 L. Cardinal

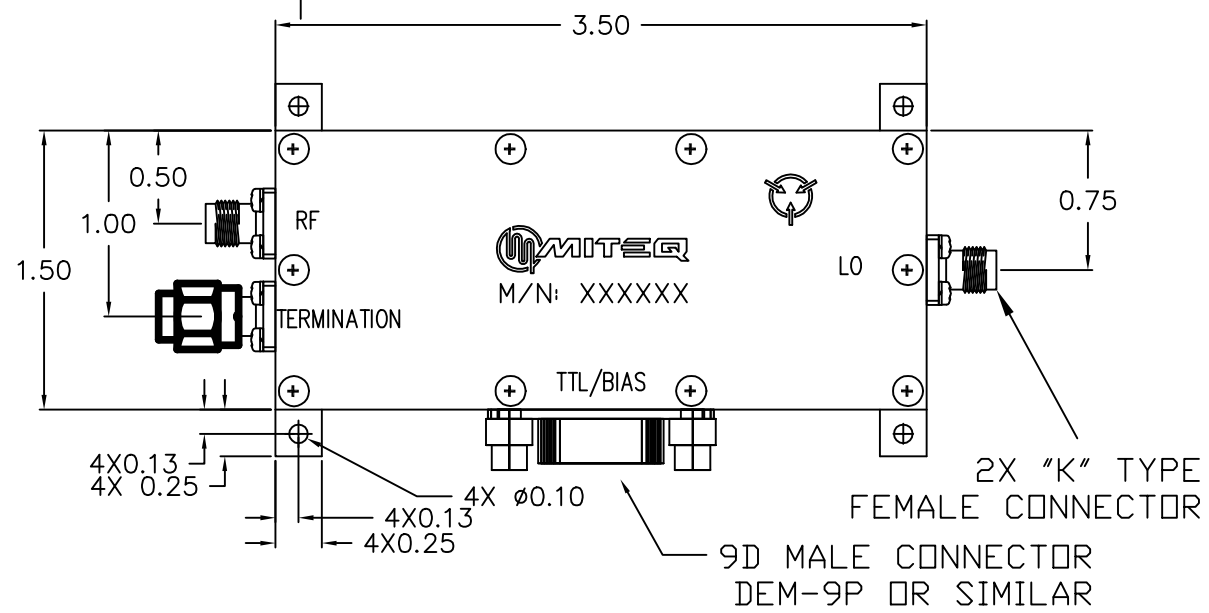

PIN	FUNCTION
1	+15V
2	GND
3	-15V
4	TTL 1 SHIELD
5	TTL 2 SHIELD
6	NC
7	NC
8	TTL 1
9	TTL 2

NOTES:
 1. FINISH: GRAY PAINT
 2. TTL INPUTS ARE AND INTERNALLY TERMINATED WITH AC COUPLED 70 OHM TERMINATIONS TO TTL SHIELD TERMINALS. USE OF 70 OHM COAX CABLE IS RECOMMENDED.
 3. TTL SHIELD TERMINALS ARE INTERNALLY CONNECTED TO CHASSIS GROUND.

ALL PAGES ARE OF ORIGINAL ISSUE (A) EXCEPT AS NOTED.	CONTR NO. Q06021711		 100 Davids Drive, Hauppauge, New York 11788
	PREP BY <i>F. Cannata</i>	DATE 5/19/2006	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (MM) TOLERANCES ON DECIMAL .XX±.01 ANGLES ±0°30'	CHKD BY <i>L. Cardinal</i>	DATE 9/11/2007	OUTLINE DRAWING QUADRA-PHASE MODULATOR C15 PKG
	PROJ ENGR <i>br</i>	DATE 9/11/2007	
	APPROVAL (PROJ)	APPROVAL (GOVT)	SIZE A CODE IDENT. NO. 33592 SCALE REV. B